



2026年10月45ft



|                      |          |                    |         |                    |          |
|----------------------|----------|--------------------|---------|--------------------|----------|
| Oil Pattern Distance | 45       | Reverse Brush Drop | 36      | Oil Per Board      | 50 ul    |
| Forward Oil Total    | 10.95 mL | Reverse Oil Total  | 10.4 mL | Volume Oil Total   | 21.35 mL |
| Tank Configuration   | Only A   | Tank A Conditioner | current | Tank B Conditioner | current  |

|   | START | STOP | LOADS | SPEED | CROSSED | START | END  | FEET | T.OIL |
|---|-------|------|-------|-------|---------|-------|------|------|-------|
| 1 | 6L    | 6R   | 1     | 10    | 29      | 0.0   | 0.0  | 0.0  | 1450  |
| 2 | 7L    | 7R   | 1     | 14    | 27      | 0.0   | 1.9  | 1.9  | 1350  |
| 3 | 9L    | 9R   | 1     | 14    | 23      | 1.9   | 3.8  | 1.9  | 1150  |
| 4 | 10L   | 10R  | 2     | 18    | 42      | 3.8   | 8.9  | 5.1  | 2100  |
| 5 | 11L   | 11R  | 2     | 18    | 38      | 8.9   | 14.0 | 5.1  | 1900  |
| 6 | 12L   | 12R  | 2     | 18    | 34      | 14.0  | 19.1 | 5.1  | 1700  |
| 7 | 14L   | 14R  | 2     | 22    | 26      | 19.1  | 25.3 | 6.2  | 1300  |
| 8 | 2L    | 2R   | 0     | 22    | 0       | 25.3  | 45.0 | 19.7 | 0     |


|   | START | STOP | LOADS | SPEED | CROSSED | START | END  | FEET | T.OIL |
|---|-------|------|-------|-------|---------|-------|------|------|-------|
| 1 | 2L    | 2R   | 0     | 30    | 0       | 45.0  | 36.0 | -9.0 | 0     |
| 2 | 15L   | 15R  | 2     | 22    | 22      | 36.0  | 29.8 | -6.2 | 1100  |
| 3 | 13L   | 13R  | 2     | 22    | 30      | 29.8  | 23.6 | -6.2 | 1500  |
| 4 | 11L   | 11R  | 2     | 22    | 38      | 23.6  | 17.4 | -6.2 | 1900  |
| 5 | 8L    | 8R   | 1     | 18    | 25      | 17.4  | 14.9 | -2.5 | 1250  |
| 6 | 7L    | 7R   | 1     | 18    | 27      | 14.9  | 12.4 | -2.5 | 1350  |
| 7 | 6L    | 6R   | 1     | 14    | 29      | 12.4  | 10.5 | -1.9 | 1450  |
| 8 | 2L    | 2R   | 1     | 14    | 37      | 10.5  | 8.6  | -1.9 | 1850  |
| 9 | 2L    | 2R   | 0     | 10    | 0       | 8.6   | 0.0  | -8.6 | 0     |

Cleaner Ratio Main MixNAForward

Cleaner Ratio Back End MixNAReserve

Cleaner Ratio Back End DistanceNACombined

Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200| 1 = 50

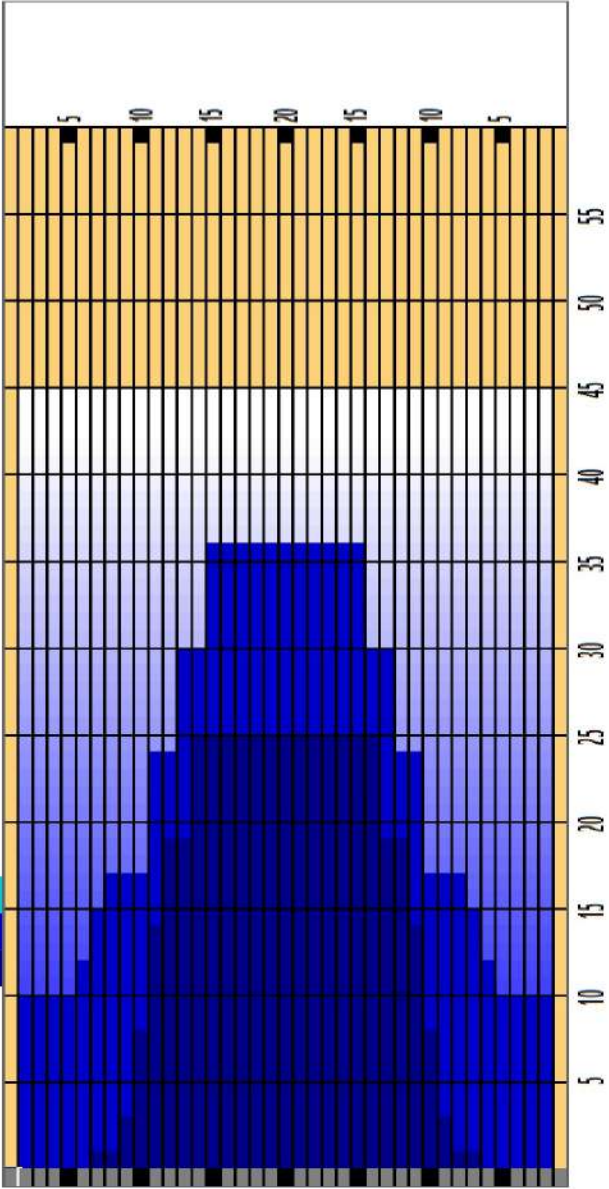

| Item             | 3L-7L:18L-18R        | 8L-12L:18L-18R      | 13L-17L:18L-18R     | 18L-18R:17R-13R      | 18L-18R:12R-8R      | 18L-18R:7R-3R        |
|------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|
| Description      | Outside Track:Middle | Middle Track:Middle | Inside Track:Middle | Middle: Inside Track | Middle:Middle Track | Middle:Outside Track |
| Track Zone Ratio | 9.55                 | 2.1                 | 1.06                | 1.06                 | 2.1                 | 9.55                 |

